


ASTINtrew®

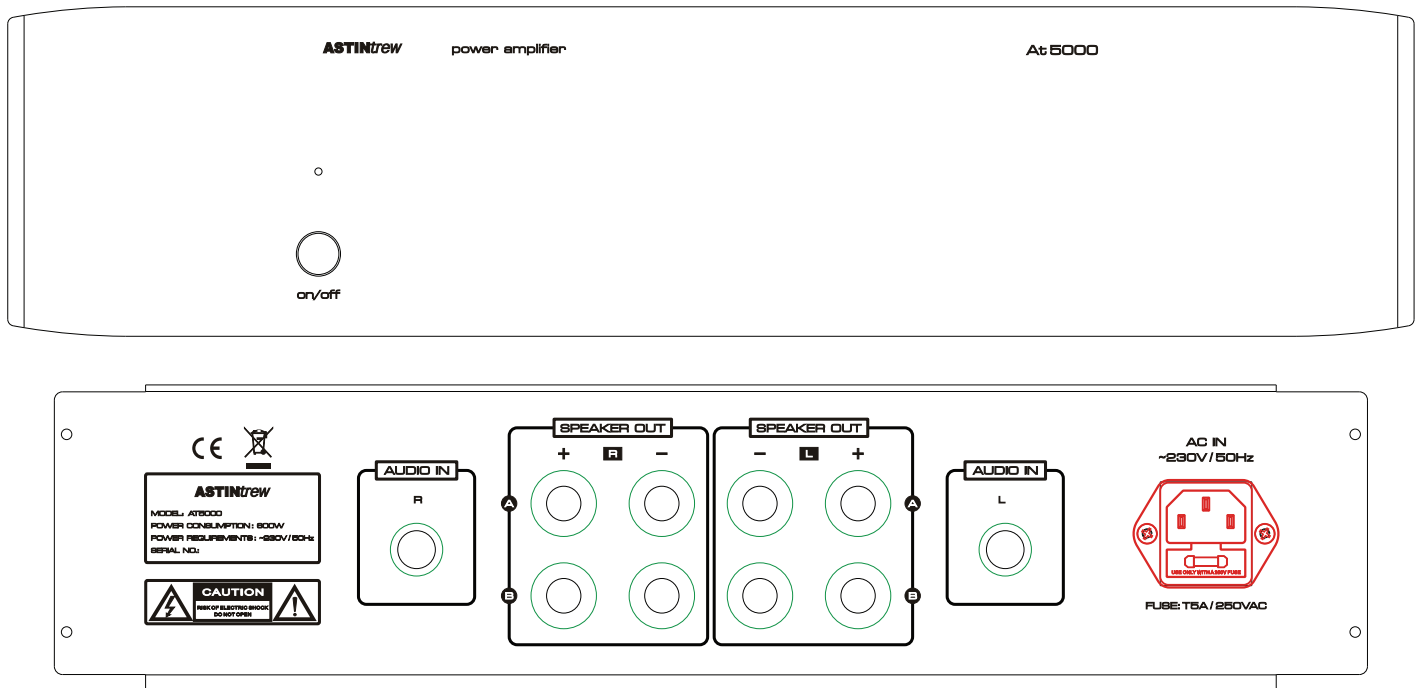

AT5000 Dual mono power amplifier

Stereo power output:	50W RMS per channel (140W peak to peak) into 8 ohms 100W RMS per channel into 4 ohms
Power supply:	2 x 300VA Low noise Toroidal Transformers
Frequency response:	+ - 0.2 db 20-20,000 hz
Total Harmonic Distortion:	0.1
Input sensitivity:	610mv
Input impedance:	47K
Signal to noise ratio:	95 db A weighted
Internal fuse rating:	5 amp slow blow 20mm x 2
Valve:	1 x ECC82 (12AU7) Electro-Harmonix type per channel (25,000 hrs recommended replacement period) Note - Output devices can withstand short circuit indefinitely, but not recommended
Mains voltage:	220-240V at 50Hz. UK, mainland Europe and Asia
Dimensions:	W 430mm D 346mm Ht 110mm inc. feet
Net weight:	13 Kg